


# DSP106B0-FM

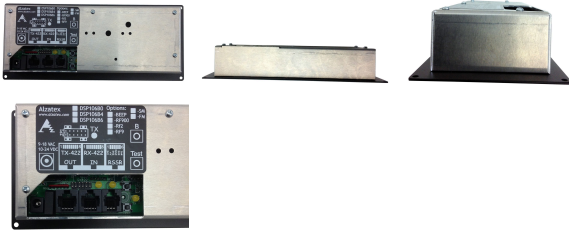

## Product

6-Digit LED Display 1" Digits, flush

### Description:

Six-Digit Display with 1" High Solid-Segment Digits, flush mount.

**Item:** DSP106B0-FM

**UPC:** 788581656884

**EAN:** 0788581656884

**Stock Status:** Usually in stock.

**Dimensions:** 8.5" x 3" x 2.75"

**Weight:** 1.5 lbs.

**MSRP:** \$349.00

## Specifications

- Two RJ45 modular connectors for RS422 serial data transmission and reception.
- Ground closure inputs to remotely start, stop or reset the timer.
- Power connector (2.1x5.5mm).
- Test button for testing and configuration.
- Power requirements: 10-15VAC or 12-20VDC.
- Current consumption: 240mA max.
- Construction: Metal enclosure, black powder coated finish.

## Features

- Count Up Timer with ground closure inputs or optional Start, Stop and Reset buttons.
- Digital Counter with ground closure inputs or optional Next (Increment), Previous (Decrement) and Reset buttons.
- Connect two or more TimeKeepers™ together. One becomes the timer, and the others become remote displays.
- Six-digit count up timer settable to Day:Hour:Min, Hour:Min:Sec, or Min:Sec.Hundredths.
- Six-digit count down timer settable to Day:Hour:Min, Hour:Min:Sec.

## In the Box

- DSP106B0-FM 6 digit LED Display.
- RC Reference guide
- WD Wiring diagram
- M8BK007F Cable, 7ft, CAT-5
- Not Included: Keypad, transformer