


DSP418B-HC

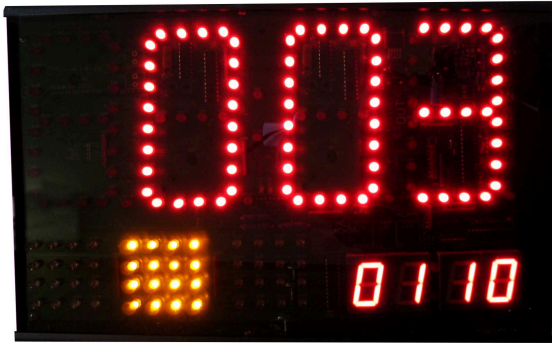

Product

LED Display 4" Display RYG

Description:

Four-Digit Display with 4" High Digits and Red LEDs, Four-Digit Display with 1" High Digits, 2"x2" LED Clusters, in Common Metal Enclosure.

Item: DSP418B-HC

UPC: 788581657058

EAN: 0788581657058

Stock Status: Usually in stock.

Dimensions: 13" x 10.5" x 2.5"

Weight: 4.6 lbs.

MSRP: \$649.00

Specifications

- Two RJ45 modular connectors for RS422 serial data transmission and reception.
- RJ11 modular connector for remote Start, Stop and Reset inputs.
- Power connector (2.1x5.5mm).
- Test button for testing and configuration.
- Power requirements: 10-15VAC or 12-20VDC.
- Current consumption: 70mA maximum per digit.
- Construction: Metal enclosure, black powder coated finish with smoke grey acrylic front.

Features

- This package includes a 4-digit Display with 4" high digits to display minutes and seconds since a patient was last checked on.
- A 4-digit Display with 1" high digits displays hours and minutes since the patient occupied this room.
- An integrated Red-Yellow-Green Indicator with 2" by 2" LED clusters glows GREEN to show that the patient was recently checked on.
- The Indicator then displays YELLOW if it has been 25 minutes or more since the patient was last checked on, and displays RED if it has been 30 minutes or more since the patient was last checked on.

In the Box

- DSP418B-HC Large LED display
- RC Reference guide
- WD Wiring diagram
- M6C002F Cable, 2ft, RJ12 6-Cond.
- RJ-SMWJ6 Surface modular phone jack
- Not Included: Transformer, Keypad or Controller.

Required Accessories

- KP2-MBGR Green mushroom wall plate button with reset button.
- WT12VAC1200MA-RA 12V AC, 1200mA transformer