


# DSP456B

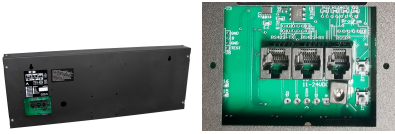

## Product

Six-digit LED Display 4" Digits

### Description:

Six-Digit Display, 4" High Digits, Solid-Segments, Black Powder Coated Metal.

**Item:** DSP456B

**UPC:** 788581651551

**EAN:** 0788581651551

**Stock Status:** Usually in stock.

**Dimensions:** 26" x 8" x 2.5"

**Weight:** 8.8 lbs.

**MSRP:** \$625.00

## Specifications

- Two RJ45 modular connectors for RS422 serial data transmission and reception.
- RJ11 modular connector for remote Start, Stop and Reset inputs.
- Power connector (2.1x5.5mm).
- Test button for testing and configuration.
- Power requirements: 10-15VAC or 12-20VDC.
- Current consumption: 140mA maximum per digit.
- Construction: Metal enclosure, black powder coated finish with transparent red acrylic front.

### Mounting methods

- Standard mounting is two D-rings, one at either end of the display.
- 1/4-20 nuts on the bottom of the unit for attaching feet or wall bracket. The feet or wall brackets are NOT included and may be ordered separately.

- Hole on the bottom of the unit for attaching a tripod. The tripod adapter is NOT included and may be ordered separately.
- The display has holes in the top for adding a handle. The handle is NOT included and may be ordered separately.

## Features

- Six-digit count up timer settable to Day:Hour:Min, Hour:Min:Sec, or Min:Sec.Hundredths.
- Six-digit count down timer settable to Day:Hour:Min, Hour:Min:Sec.

## In the Box

- DSP456B Wall display
- RC Reference guide
- WD Wiring diagram
- M8BK003F Cable, 3ft, Cat-5
- Not Included: Transformer