


DSP518B0

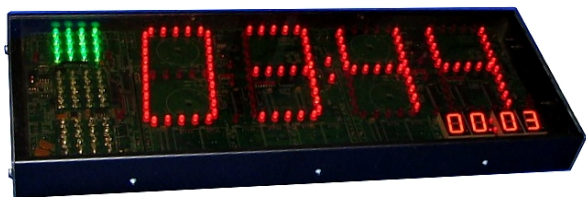

Product

Dual LED Display 5IN Display RYG

Description:

Four-Digit Display with 5" High Digits and Red LEDs, Four-Digit Display with 1" High Digits, 2" x 2" LED Clusters, in Common Metal Enclosure.

Item: DSP518B0

UPC: 788581651988

EAN: 0788581651988

Stock Status: Usually in stock.

Dimensions: 21.5" x 8" x 2.5"

Weight: 6 lbs.

MSRP: \$849.00

Specifications

- Two RJ45 modular connectors for RS422 serial data transmission and reception.
- RJ11 modular connector for remote Start, Stop and Reset inputs.
- Power connector (2.1x5.5mm).
- Test button for testing and configuration.
- Power requirements: 10-15VAC or 12-20VDC.
- Current consumption: 70mA maximum per digit.
- Construction: Metal enclosure, black powder coated finish with smoke grey acrylic front.

Mounting methods

- Standard mounting is 2 key hole slots spaced 16inch apart for wall mounting.
- There are screws at either end of the displays where D-Rings can be added. D-Rings are NOT included and may be ordered separately.
- 1/4-20 nuts on the bottom of the unit for attaching a tripod adapter or feet. The feet and tripod adapter is NOT included and may be ordered separately.

- The display has holes in the top for adding a handle. The handle is NOT included and may be ordered separately.

Features

- Count Up Timer with ground closure inputs or optional Start, Stop and Reset buttons.
- Digital Counter with ground closure inputs or optional Next (Increment), Previous (Decrement) and Reset buttons.
- Connect two or more TimeKeepers™ together. One becomes the timer, and the others become remote displays.
- Four-digit count up timer settable to Hour:Min, Min:Sec, or Sec.Hundredths.
- Four-digit count down timer settable to Hour:Min, Min:Sec.
- Power requirements: 10-15VAC or 12-20VDC.
- Current consumption: 150mA maximum per digit.
- Construction: Metal enclosure, black powder coated finish with smoke grey acrylic front.

Features with optional button module

- Count Up Timer.
- Count Down Timer. (0 to 99.59 MM:SS or 0 to 99:59:59 HH:MM:SS).
- User-programmable stored settings.
- Built-in time-of-day clock displays hours/minutes in 12/24 hour time or minutes/seconds.
- Button to turn beeper on/off.

In the Box

- DSP518B0 Large LED display
- RC Reference guide
- WD Wiring diagram
- M8BK003F Cable, 3ft, Cat-5
- Not Included: Transformer, Keypad or Controller.