


SPE3602S-BSC

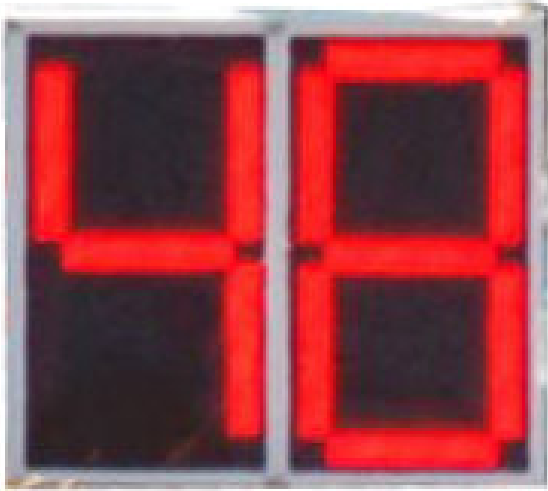

Product

Boat race starting clock 2 Digit

Description:

Two-digit Boat Race Starting Clock with 36" high super bright red LED digits, with handle and feet, water resistant enclosure, metal frame. Includes Controller.

Item: SPE3602S-BSC

UPC: 788581656280

EAN: 0788581656280

Stock Status: Special order item. Allow 12 weeks lead time.

Dimensions: 64" x 48" x 7"

Weight: 190 lbs.

MSRP: \$4,149.00

Specifications

- 7-Way Trailer connector for RS422 serial data input.
- 7-Way Trailer connector for RS422 serial data output.
- 7-Way Trailer connector for power.
- Power requirements: 12-15VDC.
- Current consumption: 3.5A maximum per digit.
- Construction: ABS Plastic enclosure with transparent red acrylic front.
- Installation options: Unistrut mounting brackets are included. You provide your own unistrut and unistrut hardware for installation.

Features

- Two-digit count down timer.
- Settable to 5min, 3min or 1min starting times.
- Includes camera LED for video recording the starting line.
- Can be powered from AC or car battery.
- Construction: Metal enclosure with with road case style enclosure and transparent red acrylic front.
- Optional loud horn.

In the Box

- DSP3602B-BSC Large LED display
- RC Reference card
- WD Wiring diagram
- DSP204B6-TMR Count Down timer controller.
- PS25A14V Power supply: 14.1 VDC, 25 Amp power supply (SS-30DV).
- ZZXX Cable from the DSP204B6 to the display.
- ZZXX Cable from the power supply to the display.
- ZZXX Cable from the AC wall outlet to the power supply.
- Not Included: Unistrut and mounting hardware.