


# DSP1002B

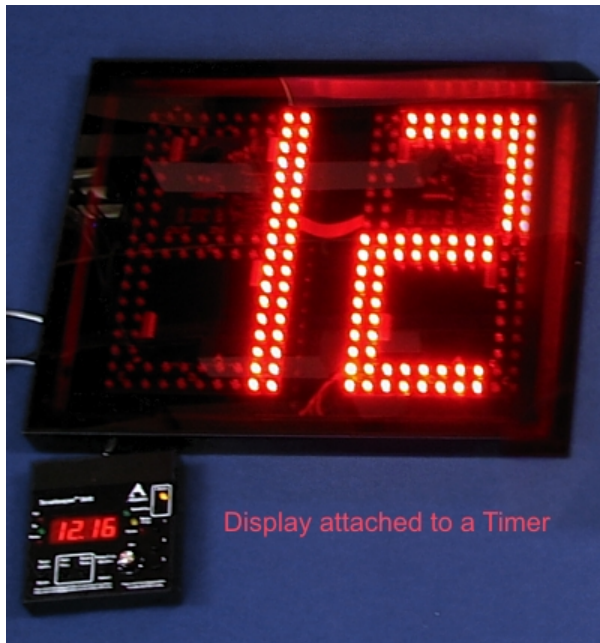

## Product

LED Display, 10" Digits

### Description:

Two-Digit Display, 10" High Digits, Super Bright Red LEDs, Metal Frame.

**Item:** DSP1002B

**UPC:** 788581651810

**EAN:** 0788581651810

**Stock Status:** Usually in stock.

**Dimensions:** 20" x 15" x 2.5"

**Weight:** 11 lbs.

**MSRP:** \$850.00

## Specifications

- (1) Two RJ45 modular connectors for RS422 serial data transmission and reception.
- (1) Power connector (2.1x5.5mm).
- (1) Test button for testing and configuration.
- (1) Connector for optional external battery (see Options).
- (1) Power requirements: 10-15VAC or 12-20VDC.
- (1) Current consumption: 540mA maximum per digit.
- (1) Construction: Metal enclosure, black powder coated finish with transparent red acrylic front.

## Features

- (1) Count Up Timer with ground closure inputs or optional Start, Stop and Reset buttons.
- (1) Digital Counter with ground closure inputs or optional Next (Increment), Previous (Decrement) and Reset buttons.
- (1) Connect two or more TimeKeepers™ together. One becomes the timer, and the others become remote displays.
- (1) Two-digit count up timer settable to Day, Hour, Min or Sec.
- (1) Two-digit count down timer settable to Day, Hour, Min or Sec.

### Features with optional button module

- (1) Count Up Timer.
- (1) Count Down Timer. (0 to 99.59 MM:SS or 0 to 99:59:59 HH:MM:SS).
- (1) User-programmable stored settings.
- (1) Built-in time-of-day clock displays hours/minutes in 12/24 hour time or minutes/seconds.
- (1) Button to turn beeper on/off.

## Item Includes

- (1) DSP1002B Large LED display
- (1) RC Reference card
- (1) WD Wiring diagram
- (1) M8BK003F Cable, 3ft, Cat-5
- (1) Not Included: Keypad, transformer