


DSP254X4B

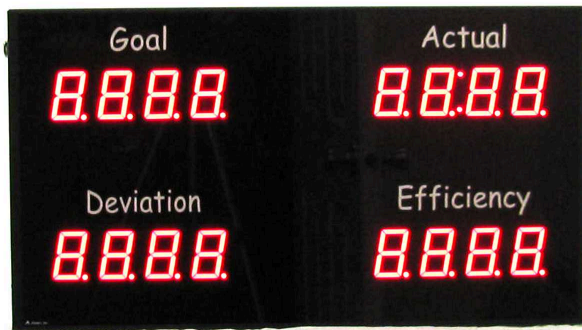

Product

Quad LED 2-1/3" Digits Display

Description:

Quad Four-Digit Display, 2-1/3" High Digits, Solid-Segments, Metal Frame.

Item: DSP254X4B

UPC: 788581652558

EAN: 0788581652558

Stock Status: Allow 2 week lead time.

Dimensions: 27" x 15" x 2.5"

Weight: 15.9 lbs.

MSRP: \$1,196.00

Specifications

- One RJ45 modular connector for RS422 serial data transmission and reception.
- One RJ11 modular connector for accessories.
- Power connector (2.1x5.5mm).
- Test button for testing and configuration.
- Power requirements: 10-15VAC or 12-20VDC.
- Current consumption: 80mA maximum per digit.
- Construction: Metal enclosure, black powder coated finish with transparent red acrylic front.
- Quad DSP254B displays in a common enclosure.
- DSP254X4B Dimensions: 27" x 15" x 2.5".

Features

- Count Up Timer with ground closure inputs or optional Start, Stop and Reset buttons.

- Digital Counter with ground closure inputs or optional Next (Increment), Previous (Decrement) and Reset buttons.
- Connect two or more TimeKeepers™ together. One becomes the timer, and the others become remote displays.
- Four-digit count up timer settable to Day:Hour, Hour:Min, Min:Sec or Sec.Hundredths.
- Four-digit count down timer settable to Day:Hour, Hour:Min or Min:Sec.

In the Box

- DSP254X4B Quad 4-Digit LED displays with 2-1/3" high digits in a common enclosure.
- RC Reference guide
- WD Wiring diagram
- M8BK003F Cable, 3ft, Cat-5
- Not Included: Transformer

Required Accessories

- WT12VAC20VA-RA Wall transformer
- PS60W150 15VDC, 4A Power Supply with 6ft power cord.

Optional Accessories

- KP215ASM 8-button keypad with knob.