



# DSP504B-NSW

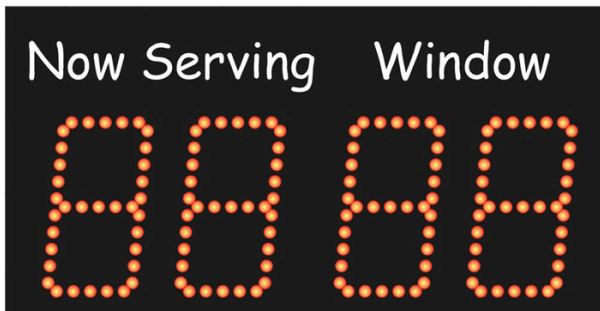

## Product

Digital LED TAKE-A-NUMBER Display 5IN

### Description:

Four-Digit Take-A-Number Display, 5" High Digits, Red LEDs, Metal Frame, "Now Serving" and "Window" Labels.

**Item:** DSP504B-NSW

**UPC:** 788581654781

**EAN:** 0788581654781

**Stock Status:** Usually in stock.

**Dimensions:** 21.5" x 8" x 2.5"

**Weight:** 5.9 lbs.

**MSRP:** \$495.00

## Specifications

- Two RJ45 modular connectors for RS422 serial data transmission and reception.
- RJ11 modular connector for remote Start, Stop and Reset inputs.
- Power connector (2.1x5.5mm).
- Test button for testing and configuration.
- Power requirements: 10-15VAC or 12-20VDC.
- Current consumption: 100mA maximum per digit.
- Construction: Metal enclosure, black powder coated finish with transparent red acrylic front.

### Mounting methods

- Standard mounting is 2 key hole slots spaced 16inch apart for wall mounting.

- There are screws at either end of the displays where D-Rings can be added. D-Rings are NOT included and may be ordered separately.
- 1/4-20 nuts on the bottom of the unit for attaching a tripod adapter or feet. The feet and tripod adapter is NOT included and may be ordered separately.
- The display has holes in the top for adding a handle. The handle is NOT included and may be ordered separately.

## Features

- Four-digit Take-a-Number Display with 5" high red LED digits.

## In the Box

- DSP504B-NSW Wall display
- RC Reference guide
- WD Wiring diagram
- M8BK003F Cable, 3ft, Cat-5
- Not Included: Transformer

## Required Accessories

- WT12VAC1200MA-RA 12V AC, 1200mA transformer

## Optional Accessories

- (2) PB1-WH White push button
- TMS3110 Ticket Dispenser Head.
- TMS3115 Ticket Dispenser Counter Stand.
- TMS3114 Take-A-Number Sign.
- TMS3300X1 Two-Digit Ticket Roll.
- M2C22G050F 50ft, 22ga, Two conductor Wire.
- RJ-SMWJ6 6 pin Phone Jack
- M6C002F Phone-cord, 2ft, 6 conductor, standard.