


KP215AFM-GC8LED

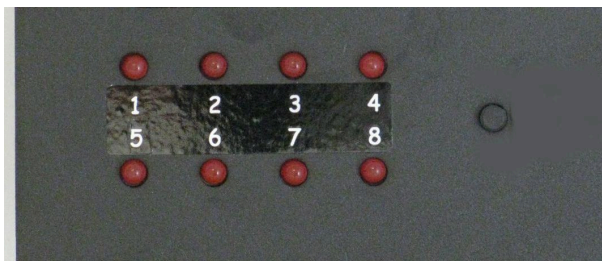

Product

Remote control button input module

Description:

Remote control module with 8 LEDs, 8 ground closure inputs and 1 button with RJ45 jacks installs on a flush mount plate.

Item: KP215AFM-GC8LED

UPC: 788581653968

EAN: 0788581653968

Stock Status: Usually in stock.

Dimensions: 2.85" x 1.8" x 1.32"

Weight: 0.25 lbs.

MSRP: \$279.00

Specifications

- RJ45 connector Receives RS422 data.
- RJ45 connector transmits RS422 data.
- Power over CAT-5 cable.
- Eight ground closure inputs for Programmable functions.
- Power requirements: 6-15VAC or 8-20VDC.
- Current consumption: 90ma.
- Construction: Metal flush mount plate, black powder coated finish.

Features

- Keypad has 8 LEDs to indicate ground closure status and one button.
- Eight ground closure inputs to connect remote buttons and/or sensors.
- Programmable buttons to perform a variety of functions.
- Factory programmed to fit your application.
- Serial data output to send commands to a remote display, Timer or other device.

- Serial data input to permit daisy chaining multiple keypads/controllers.

In the Box

- KP215AFM-GC8LED Keypad with 8 buttons and a knob.
- (4) SCREWS-ZZXX Screws (Oval head #6x1/2" wood screw).
- RC Reference guide
- WD Wiring diagram
- M8BK003F Cable, 3ft, CAT-5.
- Not Included: Transformer

Required Accessories

Works with any size Alzatex display, Red-Yellow-Green indicator or TimeKeeper™. Examples:

- DSP254B Large LED wall display
- DSP256B Large LED wall display
- DSP504B Large LED wall display